

**Power Range****kW****kVA**

Standby

96 - 127

96 - 159

MODEL:**HFW - 135 T6**

Prime

96 - 116

96 - 145

STANDARD EQUIPMENT

Open Type Set	Accessories Available for HFW-135 T6
<ul style="list-style-type: none"> ■ Skid with integral day fuel tank (non-UL) ■ HIPOWER digital auto-start control panel (Page 4) ■ Dry-type replaceable element air-cleaner ■ Industrial muffler ■ Battery, battery rack, and cables ■ Fuel and lubrication oil replaceable element filters ■ Stamford AVR brushless 12-wire reconnectable alternator ■ Oil drain hand pump ■ Vibration Isolators between base and set assembly ■ Main Line Circuit Breaker for overload protection ■ Belt driven charging alternator ■ Guards for shielding all rotating parts ■ Fuel cut-off solenoid and protection switches ■ Radiator with pusher fan ■ Operation and installation manuals 	<p style="text-align: center;"><u>Mechanical Accessories Offered</u></p> <ul style="list-style-type: none"> ■ Road towing trailers to DOT standards ■ Critical grade exhaust mufflers ■ UL double wall fuel tanks to customer specification ■ Oil field type skid ■ Flexible exhaust connection for open sets ■ Oil pressure and engine temperature gauges ■ Extended warranty coverage above the standard one year <p style="text-align: center;"><u>Generator End Accessories Offered</u></p> <ul style="list-style-type: none"> ■ Varicomp. Device for Enhanced motor Starting ■ Anti-condensation heaters in alternator <p style="text-align: center;"><u>Electrical and Control Accessories Offered</u></p> <ul style="list-style-type: none"> ■ Automatic battery chargers 5 and 10 amp ■ NFPA 110 controls and remote annunciator ■ Analog instrumentation in lieu of digital ■ Transfer switch and paralleling control panels ■ Water Jacket Heater ■ Remote control from PC via hard and/or wireless link ■ GPS for mobile sets ■ Digital Timer
<p style="text-align: center;">Sound Attenuated Enclosure</p> <ul style="list-style-type: none"> ■ Fully sound attenuated enclosure (equipped as open set) ■ Powder Painted with finish that exceeds 1000-hr salt test ■ Rock wool insulation behind protective barrier ■ Curved edges and minimum outside fasteners ■ Single lifting point 	

GENERATOR RATINGS**Standby Rating****Prime Rating**

Alternator	Voltage	Ph	Hz	kW/kVA	Amps	kW/kVA	Amps
	120 / 208	3	60	126 / 157.5	437	115 / 144	400
	127 / 220	3	60	126.5 / 158	415	115.5 / 144	379
	120 / 240	3	60	126 / 157.5	379	115 / 144	346
UCI 274E	139 / 240	3	60	127 / 159	382	116 / 145	349
	277 / 480	3	60	127 / 159	191	116 / 145	174
	347 / 600	3	60	127 / 159	153	116 / 145	140
	120 / 240	1	60	96 / 96	400	96 / 96	400

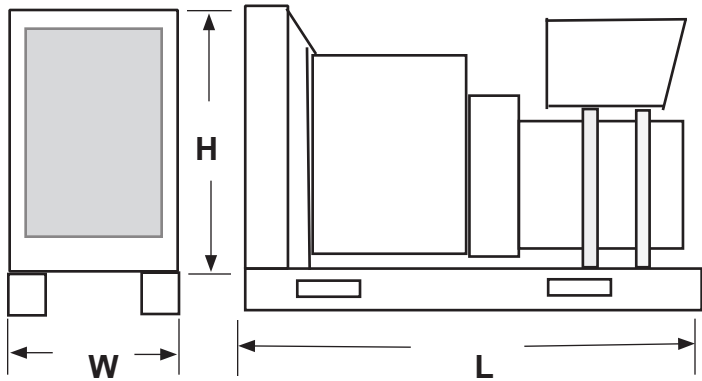
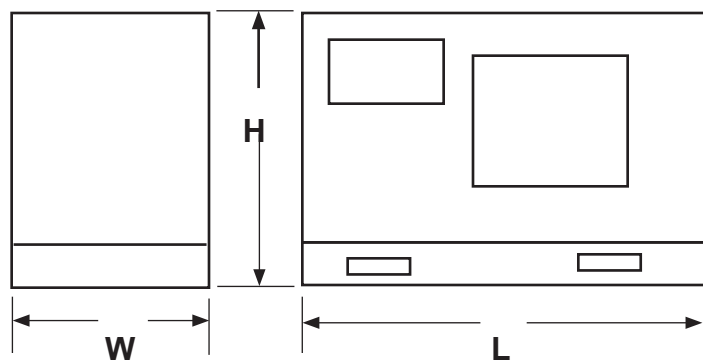
Application Data

Alternator Specifications		Engine Mechanical Specifications	
Manufacturer	Newage Stamford	Manufacturer	Iveco Aifo
Type	4-pole, rotating field	Engine model	NEF67 TM2
Exciter type	Brushless, self excited.	Engine type	4 cycle, turbocharged aftercooled
Leads: quantity, type	12, reconnectable	Cylinder arrangement	6, in-line
Voltage regulator	Solid state, volts/Hz and excitation overload protection	EPA Certification :	TIER 3
Insulation:		Displacement, L (cu. in.)	6.7 (409)
Material.....	Class H	Bore and stroke, mm (in.)	104 x 132 (4.09 x 5.20)
Temperature rise.....	150° C , standby	Compression ratio	17.5 : 1
Bearing: quantity, type	Single bearing sealed	Piston speed, m/min. (ft./min.)	475.2 (1,559)
Coupling	Flexible disc	Main bearings: quantity, type	7, replaceable insert
Amortisseur Windings	Full	Rated rpm	1,800
Voltage regulation, no-load to full load	± 1.0% (with Self Excited)	Max. power at rated rpm, kWm (BHP)	142 (190.0)
Unbalanced load capability	100% of rated standby current	BMEP, gross, psi (Bar)	194 (13.4)
Load acceptance	Per ISO - 8528	Overall thermal efficiency	38.9%
Peak motor starting kVA: 480 V	(30% dip) Self-excited 450 kVA PMG 590	Exhaust Gas Flow, m ³ /min (cfm)	30.0 (1,058)
Engine Electrical Specifications		Exhaust gas temperature °C (°F)	480 (896)
		Frequency regulation, no-load to full load	4.5%
Engine Electrical System (12 Volt) 60 Hz		Governor: Type:	Mechanical
Battery charging alternator:		Make:	Stanadyne
Ground (negative/positive).	Negative	Standard:	ISO 3046-4 Class A1
Volts (DC).....	14V	Frequency regulation, steady state	± 0.8%
Ampere rating.....	90A	Frequency	Fixed
Starter motor rated voltage (DC)	12V	Air cleaner type	Dry
Starter motor rated kW:	3 Kw	Remote Radiator System	
Battery CCA rating:	800A	Fuel Consumption 60 Hz	
Battery & qty, AH rating:	1 x 100AH		
Battery Voltage (DC)	12V		
Not Available		Diesel gal/hr (L/hr) Standby Rating	
		100% 10.0 (37.8)	
		75% 8.0 (30.2)	
		50% 6.0 (22.9)	
		25% 3.0 (11.3)	
		Diesel gal/hr (L/hr) Prime Power Rating	
		100% 9.6 (36.3)	
		75% 6.9 (26.2)	
		50% 4.9 (18.5)	
		25% 2.9 (10.9)	
Contact the HIPOWER distributor for special cooling options			

Application Data

Cooling		Lubrication	
Radiator Systems	60 Hz	Lubricating System	60 Hz
Ambient temperature, °C (°F)	50 (122)	Type	Full Pressure
Engine jacket water capacity L (gal)	10.5 (2.77)	Oil pan capacity, L, (qt.)	12 (12.9)
Radiator system capacity, including engine, L (gal.)	40.5 (10.70)	Recommended lube oil	ACEA E3-E5
Engine jacket water flow, L/min (g/min)	169 (44.6)	Oil pan capacity with filter, L (qt.)	17.2 (18.2)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	58.1 (3,303)	Oil filter: quantity, type	1, cartridge
Heat rejected to charge cooler at rated Kw, dry exhaust, kW (Btu/min.)	19.2 (1,094)	Oil cooler	Oil to water
Water pump type	Centrifugal	Maximum oil temperature, °C (°F)	120 (248)
Fan, kWm (HP)	6.0 (8.0)	Ventilation and Air-Flow Requirements	
Max. restriction of cooling air, intake and discharge side of radiator, Pa (in. H ² O)	61.25 (0.25)	Air Requirements	60 Hz
dB(A) LEVEL SOUND ATTENUATED ENCLOSED	70 dB(A) @ 23 feet	Radiator-cooled cooling air, m ³ /min. (scfm)	342 (12,077)
		Air density kg/m ³ (lbm/ft ³)	1.20 (0.075)
		Heat rejected to exhaust, kW (btu/min)	116.2 (6,609)
		Heat radiated to surrounding air Engine:kw (btu/min)	17.3 (982)
		Combustion air, m ³ /min. (cfm)	11.6 (411)

Dimensions and Weights

Open Skid Model		Sound Attenuated Enclosure	
Overall size, L x W x H, mm (ins.)	2,900 x 900 x 1,592 (114.2 x 35.4 x 62.7)	Overall size, L x W x H, mm (ins.)	3,300 x 1,200 x 1,800 (129.9 x 47.2 x 70.9)
Weight, radiator-mounted model, wet, kg (lb.):	1,500 (3,307)	Weight, radiator-mounted model, wet, kg (lb.):	2,235 (4,927)
Fuel Tank Capacity, L (US gal)	360 (95.1)	Fuel Tank Capacity, L (US gal)	245 (64.7)
			

NOTE: The drawings above are only representative of the overall dimensions. For full detailed installation drawings please consult your local distributor or contact Himoina Power Systems @ www.hipowersystems.com

RATINGS: Power factor three-phase is 0.8 and single-phase unity. Standby Ratings: Standby ratings assume installation normally served by reliable utility power. The standby rating is available for varying loads for the length of the power outage. No overload is available with the standby rating. Ratings are in accordance with ISO-3046/1 and DIN 6271. Prime Power Ratings: Prime power ratings assume no or unreliable utility power. For varying loads the generator set has unlimited operating hours. A 10% overload capacity is available for any 1 hour in a 12 hour continuous running period. Ratings are in accordance with ISO-3046/1 and DIN 6271. Consult Himoina for limited running time and base load ratings. Himoina reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. DERATION GUIDELINES: Altitude: Derate 1.3% per 100 m (328 ft) elevation above 1000 m (3280 ft). Temperature: Derate 1.0% per 10°C (18°F) temperature above 40°C (104°F).

HIPOWER CEM6 Auto-Start Digital Control Panel



CONTROLLER DISPLAY :

1. Voltage between each Phase & Neutral
2. Voltage between Phases
3. Current (amps) on each Phase
4. Frequency
5. Active, Aparent & Reactive Power
6. Power Factor
7. Instant Power (KwH) and Accumulative power (day, month & year)
8. Fuel reserve
9. Oil pressure, coolant temperature
10. Battery voltage, battery charging alternator voltage
11. Engine Speed
12. Hours running

ENGINE ALARMS :

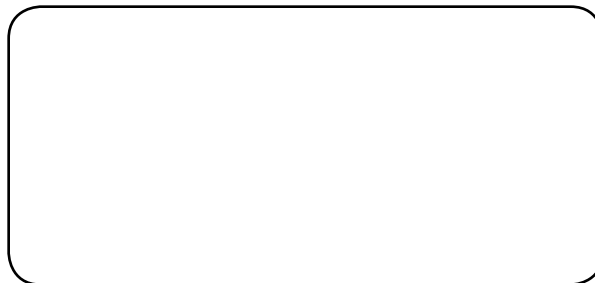
1. High coolant temperature
2. Low oil pressure
3. Emergency stop

4. Battery charging alternator failure
5. Low coolant level
6. Low fuel level
7. Over speed
8. Under speed
9. Battery low voltage

GENERATOR ALARMS :

1. Over-load
2. Unbalanced voltage
3. Over-voltage
4. Under-voltage
5. Over-frequency
6. Under-frequency
7. Short-circuit
8. Inverse Power
9. Incorrect phase sequence

Distributor:



MEMBER

